





LED DOWNLIGHT

Feature

Designed for recess vertical mounting ceiling. LED downlight lights highlighting the use of a new generation of low power and high power LED as light source. LED life of up to 50,000 hours, not easily damaged, recyclable waste, no pollution.

Application

Ideal for commercial building, offices, conference room, classrooms, shops etc.

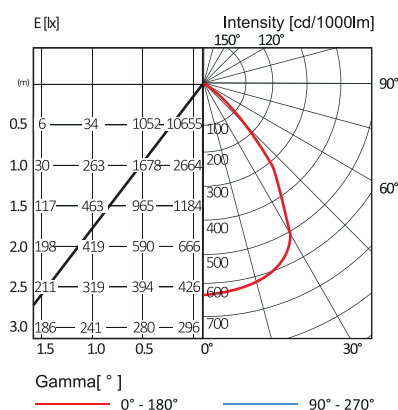

Technical Data

Body	Made of C.R.S 0.5mm
Reflector	Matt finish aluminium.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Cree XLamp ® CXA3070.
Electrical Data	220 - 240V, 50Hz, Power factor 0.95.
Wire	HR 105°C
Driver	Integrated or Isolated.

Model No.	Ø (MM)	H(MM)
SL177	130	153

Note : Subject to +/- 1.5mm


In collaboration with :



Technical Specification



XLamp® XM-L



Ordering Code	Module Type	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	CRI	CCT (k)	Beam Angle (°)	Lifetime (hrs)
XMLAWT-00-0000-0000T5051	-	10	1040	104	65	5000 - 8300	125	-
XMLAWT-00-0000-0000T6051	-	10	1040	104	65	5000 - 8300	125	-
XMLAWT-00-0000-0000U2051	-	10	1040	104	65	5000 - 8300	125	-
XMLAWT-00-0000-000LT40E4	-	10	1040	104	75	3700 - 5000	125	-
XMLAWT-00-0000-000LT50E4	-	10	1040	104	75	3700 - 5000	125	-
XMLAWT-00-0000-000HT20E7	-	10	1040	104	80	2600 - 4300	125	-
XMLAWT-00-0000-000HT30F7	-	10	1040	104	80	2600 - 4300	125	-
XMLAWT-00-0000-000LT20E7	-	10	1040	104	80	2600 - 3700	125	-
XMLAWT-00-0000-000LT30F7	-	10	1040	104	80	2600 - 3700	125	-
XMLAWT-00-0000-000PS40E7	-	10	1040	104	85	2600 - 3200	125	-
XMLAWT-00-0000-000PS50E7	-	10	1040	104	85	2600 - 3200	125	-
XMLAWT-00-0000-000PS60E7	-	10	1040	104	85	2600 - 3200	125	-
XMLAWT-00-0000-000US40E7	-	10	1040	104	90	2600 - 3200	125	-
XMLAWT-00-0000-000US50E7	-	10	1040	104	90	2600 - 3200	125	-
XMLAWT-00-0000-000US60E7	-	10	1040	104	90	2600 - 3200	125	-

*Other models are available upon request.



XLamp® XT-E



Ordering Code	Module Type	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	CRI	CCT (k)	Beam Angle (°)	Lifetime (hrs)
SLH403	CREE 130W H120 V3 6000K	128	10,000	78	90	6000	-	-

*Other models are available upon request.



XLamp® XP-G2



Ordering Code	Module Type	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	CRI	CCT (k)	Beam Angle (°)	Lifetime (hrs)
SL501	CREE XP G2	70	6,580	94	75	6500	-	50,000
SL501	CREE XP G2	140	13,160	94	75	6500	-	50,000
SL501	CREE XP G2	180	16,920	94	75	6500	-	50,000

*Other models are available upon request.



XLamp® CXA 3070



Ordering Code	Module Type	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	CRI	CCT (k)	Beam Angle (°)	Lifetime (hrs)
SL177	CREE CXA 3070	50	4800	96	>80	4000	-	50,000

*Other models are available upon request.